




# Smart WiFi Dash Camera P1 Duo

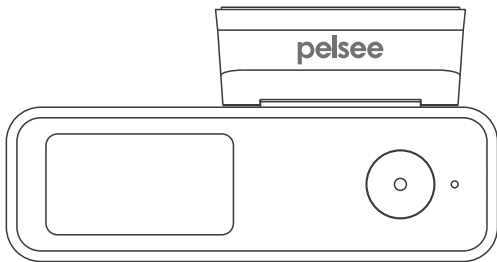

## **USER MANUAL**

Please carefully read the user manual before using and keep it well for future reference.

## Dear Customer,

Thank you for selecting **Pelsee** as your preferred brand!

We sincerely hope that you will enjoy using our product as much as we do.

If you happen to encounter any issues while using the product, or if you have any ideas on how we can enhance it, please don't hesitate to get in touch with us. You can contact us through our official website at **[www.pelsee.com](http://www.pelsee.com)** or by emailing us at **[support@pelsee.com](mailto:support@pelsee.com)**.

Our dedicated support team will be delighted to help you find a solution that meets your satisfaction as quickly as possible.

**Yours Sincerely,**  
**Pelsee Team**

# ENGLISH

# SAFETY PRECAUTIONS


To prevent injury or damage, please read and follow these safety precautions:

1. Read and understand the user manual before using the product and keep it safe for future reference.
2. Only use the original accessories provided by the manufacturer.
3. Remove the protection film on the LCD display and lenses before using the product.
4. DO NOT try to disassemble, alter or repair the product yourself. Please ask for the help from the manufacturer or similarly qualified person in order to avoid a hazard. After repairing, please do a safety check to ensure that the product is working properly.
5. This product must not be placed in a location that may affect the deployment of air bags, and must not obstruct the driver's view.
6. If there is a malfunction or abnormality, such as smoke or strange odor, please stop using the product immediately, then cut off the power supply and contact us.
7. NEVER install the unit in the place where is exposed to the direct sunlight or extremely high temperature. The operating temperature of this product ranges from  $-10^{\circ}\text{C}$  ( $14^{\circ}\text{F}$ ) to  $60^{\circ}\text{C}$  ( $140^{\circ}\text{F}$ ).
8. Drive safe! NEVER operate the App and the product when you are driving to avoid a traffic accident caused by distraction. Be sure to park the car in a safe place before operating.
9. This product must be securely mounted before driving.

# WHAT'S INCLUDED



Mini WiFi Dash Camera




Rear Camera  
(19.7ft/6m)



Car Charger  
(11.5ft/3.5m)



Adhesive Cable Clip x4



Screw Driver x1



Easy Pry Tool



Adhesive Pads  
(2 on Cameras)



Cleaning Cloth




Static Sticker x4



User Manual

# KNOW YOUR DASH CAM


## Dash Cam

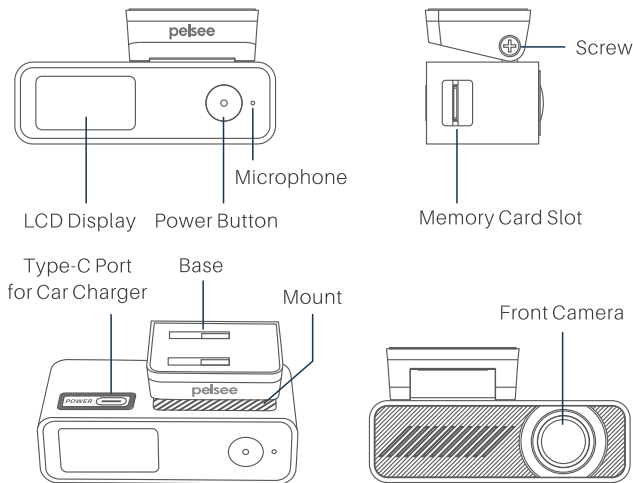

### Function of the Power Button

- ① Press this button once to check the live view from the rear camera if you have installed it.
- ② Press this button twice to see the date and time.
- ③ Press this button three times to turn on the WiFi of the camera.
- ④ Press this button the fourth time to go back to the recording interface.
- ⑤ Press and hold this button for 3 seconds to manually power off/on the camera.
- ⑥ Press and hold this button for 8 seconds to restore the camera to factory settings.

## LCD Display




- ① **Recording Status:**
  - Flash Red:** Recording Standard Videos
  - Flash Yellow:** Lock the Current Video
- ② **Memory Card Status**
- ③ **Microphone On/Off**
- ④ **WiFi Connection Status:**
  - WiFi Not Connected:** Gray
  - WiFi Connected:** Green

## INSTALLATION INSTRUCTIONS

### Step 1:

To start, insert a formatted memory card(not included) into the dash cam.  
This dash cam can take a card with a capacity of up to 256GB.

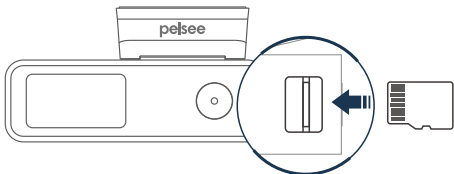

## Tips:

1. Before first use, please format the memory card.

**Option 1:** Install the memory card into a card reader, then connect it to the computer to format it to FAT32.

**Option 2:** After connecting your mobile device to the camera, install the memory card into the dash cam and go to the **Pelsee Cam App > Camera Settings > Format SD Card** to format the card.

2. To ensure smooth video recording, use a reputable Class 10 or higher speed memory card.

3. Never remove the memory card while the camera is on, as this can cause the camera to shut down immediately and potentially damage the video.

## Step 2:

Turn off your vehicle's engine, and find a suitable location on the front windshield to attach the dash cam. Use the cleaning cloth provided to clean the spot and affix the larger static sticker on it.


## Step 3:

Peel off one side of the **3M Adhesive Pad** on the base. Then, attach the base of the camera to the static sticker using the other side of the **3M Adhesive Pad**. When mounting the camera on the static sticker, ensure that the lens is positioned outside the area covered by the sticker to get a clear view.




#### Step 4:

Connect the Type-C connector of the **Car Charger** to the **Type-C Port** on the camera, and plug the other end into the **Cigarette Lighter Receptacle** in your vehicle.

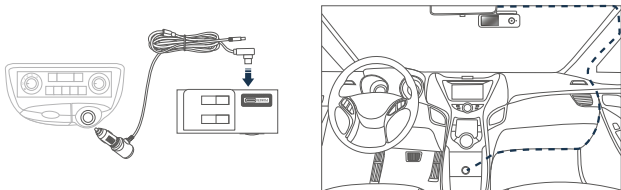


#### Tips:

1. After installation, start your vehicle's engine to ensure the dash cam powers on and records automatically. If it does, stop the engine and proceed to install the rear camera.
2. You can adjust the angle of the base to adjust the lens view.




3. To remove the dash cam from the base, first disconnect the Type-C cable, then firmly press and hold the base while slowly sliding the dash cam leftward with force.






### Step 5:

Connect the 4-pin male connector of the rear camera to the 4-pin female connector of the car charger cable. Snake the cable of the rear camera through the vehicle to the rear part.




### 💡 Tip:

To keep your vehicle tidy, we recommend using the **Adhesive Cable Clips** provided to fix the cables of the car charger or rear camera over the edge of your vehicle.



### Step 6:

Select an appropriate location on the upper part of your vehicle's rear windshield, clean it thoroughly, and affix the smaller static sticker onto it. Next, remove the **3M Adhesive Pad** from the rear camera and securely attach it to the static sticker. The camera lens can be adjusted by rotating it to alter the viewing angle.

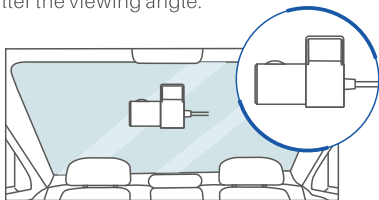

**Attach the rear camera inside the back windshield as shown to avoid upside down view.**

The selected spot should avoid the shadows from the car's spoiler or airfoil, so the camera can capture natural lighting and display a more genuine image.

### Step 7:

Start your vehicle's engine to verify that the rear camera is installed correctly and working well.

### Step 8:

Clean front/rear windshields and remove protective materials from LCD, cameras lenses for clear view.

## OPERATION GUIDE OF USING THE APP

### 1. Connect the Dash Cam with the App

#### Step 1:

Download and install the **Pelsee Cam** App on your mobile device by scanning the QR code below or searching for it on Google Play™/App Store™.




#### Step 2:

Ensure that the dash camera is turned on and mobile device is within 5 meters of the camera.



#### Step 3:

Press the power button three times to activate the WiFi of the dash cam.





## Step 4:

Open the **Pelsee Cam App** and grant the necessary permissions. Tap on **Add Camera** to check the wizard and start connecting.



## Step 5:

Tap on **Connect WiFi** and go to the **Settings > WLAN** of your mobile device to search for the **P1\_Duo\_\*\*\*\*\*** WiFi. Enter the password **12345678** to complete the connection process.



## Step 6:

Return to the App and wait for the connection. Tap on **Into Camera** to enter the homepage.




### Tips:

- ① If a window pops up on your mobile device asking if you want to continue connecting to the camera's WiFi even though it can't access the Internet, select **Yes**. Selecting **No** will disconnect the camera's WiFi.
- ② Only one mobile device can connect to one camera at a time.
- ③ Any videos or photos downloaded from the App will also be saved in the **Album** on the main page. Tap on **More** to access options such as **App Settings**, **Get Support**, **Help**, and **About**. In **App Settings**, you can change the language of the App and the date format of the camera; **Get Support** allows you to directly send an email to us about any detailed issues; **Help** provides access to frequently asked questions on our website; **About** lets you check and update the App version, and view the official website and email address.

## 2. Overview of the App



### Homepage

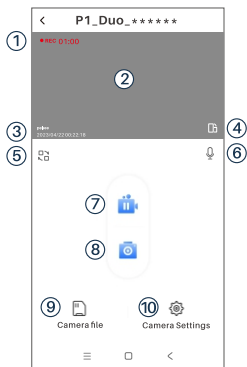

- 1 Recording Status
- 2 Live View
- 3 Date and Time
- 4 Orientation  
(Portrait or Landscape)
- 5 Switch Front and Rear Cameras' Views
- 6 Audio On/Off
- 7 Start/Stop Recording
- 8 Take Photo
- 9 Recorded Videos and Captured Images
- 10 Camera's Detailed Settings

### Camera File



To view and manage your camera files, tap on **Camera File** on the homepage. From here, you can see all your videos and photos, and select a file to delete or download.



- ① **Loop:** Standard Videos from the front and rear cameras  
**Snapshot:** Captured Photos from the front and rear cameras  
**Locked:** Locked Videos from the front and rear cameras  
**Parking:** Videos Recorded when Parking (An extra hardwire kit is needed)  
**F:** Videos or Photos from the front camera  
**R:** Videos or Photos from the rear camera
- ② Tap **Select** on the upper right corner to select the file(s) to download it/them into your mobile device or delete the file(s).  
 After downloading the file(s), you can edit or directly share it(them) to social media.

## Settings

Tap **Camera Settings** on the homepage to check and change the settings of your dash cam.

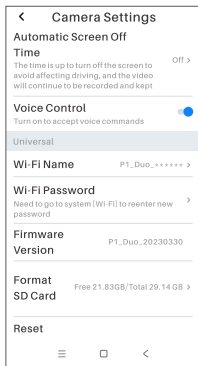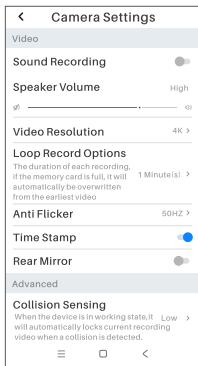

### ① Sound Recording

Turn on or turn off the audio when recording videos.

## ② Speaker Volume

Set the volume of the speaker for the camera.

## ③ Video Resolution

If you have only installed the front camera, you will be given the option to choose from three different resolutions: 4K, 2K, and 1080P. You can adjust the resolution of the front camera based on these options.

However, if you install both the front and rear cameras simultaneously, you will only have the choice between 2K and 1080P. The front camera will be set to 2K resolution, while the rear camera will be set to 1080P resolution.

## ④ Loop Record Options

Change the recording time of each video. The recording time is set to be 1 minute by default. You can choose from **1 Minute(s)**, **2 Minute(s)** and **3 Minute(s)**

## ⑤ Anti Flicker

Change the refresh rate of your video between 50Hz and 60Hz.

## ⑥ Time Stamp

Show or hide the date and time watermark on the recorded videos and captured photos.

## ⑦ Rear Mirror

Flip the rear camera view horizontally to change the orientation between leftward and rightward.

## ⑧ Collision Sensing

Set the G-sensor sensitivity for collision detection while driving. You can select from **Low**, **Middle**, **High**, and **Off** as needed. If you select High (low), the camera would automatically lock the current video when your car

encounters a minor(severe) collision. A flashing yellow dot on the upper left corner of the LCD display will be displayed, indicating the camera is locking the current video. This video will not be overwritten.

### ⑨ Automatic Screen off Time

Set a designated time for the screen to turn off automatically.

### ⑩ Voice Control

Turn on or turn off the voice control function. This camera can be controlled via four voice commands, including **Turn on Audio**, **Turn off Audio**, **Lock the Video** and **Take Photo**.

#### NOTE:

If you installed a hardwire kit (sold separately) for the dash cam, the **Parking Mode** option will be available for you to use. This mode can be turned on when your vehicle is parked, and you can adjust the sensitivity level for collision detection. Additionally, time-lapse video may also be available. Please contact Pelsee customer service team for more information.

### ⑪ Wi-Fi Name

Check and change the camera's WiFi name.

### ⑫ Wi-Fi Password

Check and change the camera's WiFi password.

### ⑬ Firmware Version

Check the firmware version of the dash camera.

### ⑭ Format SD Card

Format the memory card.



## ⑮ Reset

Restore the dash camera to the factory settings.

# SPECIFICATIONS

Sensor	GC4653
Memory Card	Support up to 256GB (not included)
Resolution(Front Camera)	4K, 2K and 1080P
Resolution(Rear Camera)	1080P
Video Format	TS
Photo Format	JPG
Storage Temperature	-22°F(30°C)~ +185°F(85°C)
Working Temperature	-14°F(10°C)~ +140°F(60°C)

## FCC CAUTION

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

#### Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

## ISED Statement

This device complies with Industry Canada license-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The digital apparatus complies with Canadian CAN ICES-3 (B)/NMB-3(B).

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

l'appareil numérique du ciem conforme canadien peut -3 (b) / nmb -3 (b).

This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information

on RF exposure and compliance.

Cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 du cnr - 102 et conformité avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 0cm between the radiator & your body.

Cet équipement est conforme Canada limites d'exposition aux radiations dans un environnement non contrôlé.

Cet équipement doit être installé et utilisé avec une distance minimale de 0 cm entre le radiateur et votre corps.

## CAUTION

RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE.  
DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

 The symbol indicates DC voltage



RECYCLING

This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment. User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.

This product can be used across EU member states.

EU Compliance Statement: Shenzhen Vycol-Glint Innovations Technology co., Ltd hereby declares that this device is in compliance with the essential requirements and other relevant provisions of the Directive 2014/53/EU.

EC	REP
----	-----

GLOBAL ONE SOLUTION LTD  
Address: 6 rue d'Armaillé 75017 Paris  
E-Mail: GstarUK.service@hotmail.com

UK	REP
----	-----

GLOBAL STAR UK SOLUTION LTD  
Address: 7 COPPERFIELD ROAD COVENTRY, WEST  
MIDLANDS, ENGLAND UNITED KINGDOM CV2 4AQ  
E-Mail: GstarUK.service@hotmail.com

**Manufacturer:**

Shenzhen Vycol-Glint Innovations Technology co., ltd

**Address:**

No. 26, Gangsheng Road. Building A, Room 509, Bao'an District,  
Shenzhen, Guangdong